




i-4S

INNOVATION FOR SHELTER

GV series

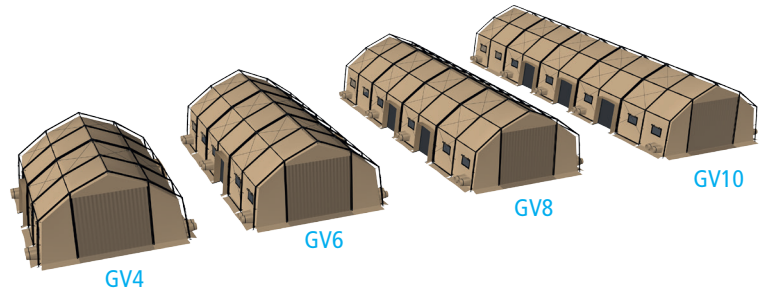

Hung fabric and aluminium frame

The main fabric of the shelter is hung to the frame. It gives complete weather protection (wind, snow, rain, sand) as well as a blackout protection. The main fabric is made of a woven polyester PVC coated on both sides.

Thermal fly

The thermal fly is an external solar shade used to reduce the extreme radiant heat transfer from the outside environment to the inside of the shelter. It can be easily deployed over the aluminium frame while keeping an air gap in between itself and the main fabric.

Inner liner

The GV series can be pre-fitted with an inner liner. **i-4S** proposes two types of material which both improve the comfort inside. The addition of the inner liner increases the level of the thermal insulation.

Modularity

The GV tent can be extended in length as much as needed by the addition of 5,4 m long module. All loads are hand portable and no tools are required to set up the tent. The GV tent can be connected to all other **i-4S** tents in line or in cross configuration.

Quick setting up

The GV tent incorporates a patented state-of-the-art folding frame design. The shelters can be erected in under 1 hour with few people. The ease with which the GV series deploy saves soldiers time and simplifies training.


Robust, reliable and suitable


i-4S is a manufacturer of quick setting up tents that are highly transportable due to their simple but robust design and lightweight features.

The GV shelters resist to 110 km/h constant wind with gusts up to 130 km/h. They have been set up and taken down in the field more than 50 times.

They can support up to 50 kg/m² of snow load sustained for 12 hours. They can withstand 50 l/m²/h of wind driven rain sustained for 30 minutes.

The blackout capability has been checked at 100 meters by the naked eye and at 300 meters with a night vision goggles.

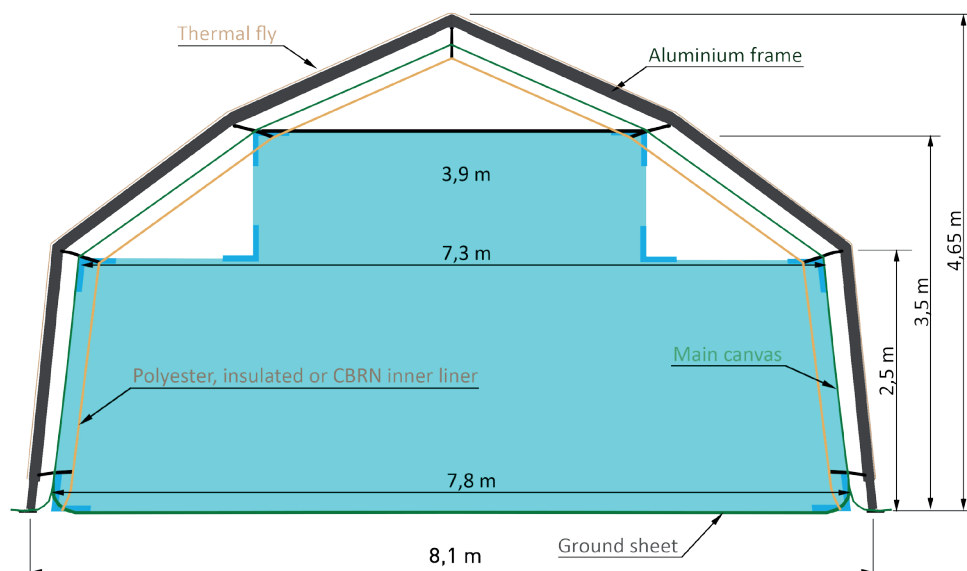

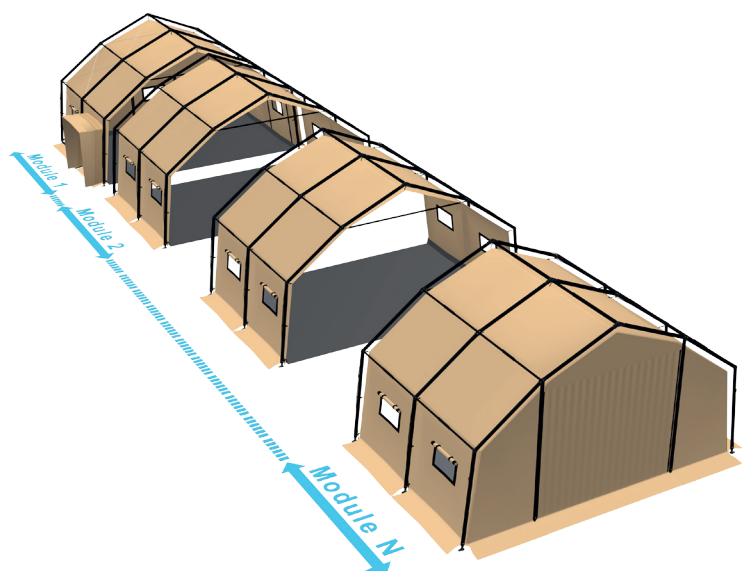

CBRN colpro

The GV tent can be used as COLPRO shelter thanks to the addition of the optional CBRN resistant inner liner and an air filtration unit. COLPRO shelters are designed to protect people in contaminated areas and can be set up as a conference room, container protection, etc.

Accessories

i-4S designs their shelters taking into account the global solution for which the shelters are intended for. The position and the fixation of the lighting and electrical systems, the plenums, the partition curtains, etc are optimized in order to ease the set-up and the use and to reduce the logistical burdens.

Available configurations

General characteristics

Model	Qty of modules	Length (m)	Width (m)	Height (m)	Area (sqm)	Weight (kg)
GV2	1	5,4	8,1	4,65	44	342
GV4	2	10,8	8,1	4,65	88	684
GV6	3	16,2	8,1	4,65	132	1026
GV8	4	21,6	8,1	4,65	176	1368
GV10	5	27	8,1	4,65	220	1710

Packaging and storage

Storage in PVC bag			Length (m)	Width (m)	Height (m)	Weight (kg)
Model	Frame	Body	2,2	0,65	0,32	152
		Legs	2,2	0,53	0,15	70
	Fabrics	Main canvas	2,2	0,6	0,5	120*
		Thermal fly (c/w gable end)	2,1	0,3	0,25	40
		Inner liner	2,1	0,3	0,25	35
		Insulated inner liner	2,1	0,3	0,25	53
	Kits	Staking	0,67	0,51	0,37	35
		Bracing straps	0,9	0,35	0,15	5

*Depends of the configuration (doors, gable ends, windows...)



Frame colour	Black
Canvas colour	NATO green, sand or white
Frontal cargo door	3,8m x 3,3m (WxH)
Frontal pedestrian door	1,8m x 2m (WxH)
Lateral pedestrian door	Optional : 1,8m x 2m (WxH)
Lateral window	Yes with crystal + external shutter
Mosquito net on lateral window	Optional
Ground sheet	Fully welded or velcro
Polyester inner liner	Optional
Insulated inner liner	Optional
Thermal fly	Optional
CBRN liner	Optional
Partition curtain	Optional
Protective ground sheet	Optional
Connection to container or vehicle	Optional
Blackout capability	Optional
Ceiling net	Yes
Sleeve	4
Additional sleeve	Optional
Marking / logo	Optional
Flammability of the fabrics	M2
Fabrics repair kit	Yes
Staking kit	Yes