

V18 tent



FLOOR AREA

18 m²

5.80 × 2.90 m footprint

SET-UP

< 5 min

with two people

PACKED WEIGHT

146 kg

in three bags


WIND RESISTANCE

130 km/h

frame and cover fitted

The V18 tent is ideally suitable to be connected to other tents in cross configuration for field hospitals and command posts for instance. The V18 tent model offers 18 sqm easily set up within 5 minutes by 2 people.

DIMENSIONS

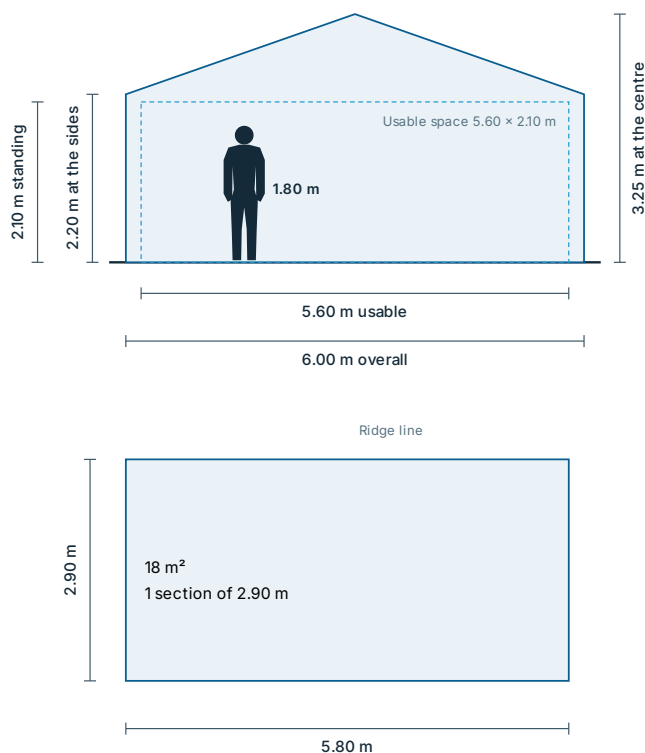

Floor area	18 m ²
Footprint	5.80 × 2.90 m
Overall width	6.00 m
Usable width	5.60 m
Height at the centre	3.25 m
Height at the sides	2.20 m
Standing height	2.10 m
Sections of 2.90 m	1

PACKING AND SET-UP

The complete shelter, in 3 packages

146 kg

68 kg	65 kg	
-------	-------	--

< 5 min

Deployed by 2 people

■ Frame (body + legs)	68 kg
■ Main canvas Depends on the configuration (doors, gable ends, windows,...)	65 kg
■ Staking kit	13 kg

RESISTANCE

130 km/h

Wind resistance - frame and cover fitted

50 kg/m²

Snow load - on the frame

- Snow load
- Wind resistance
- Water tightness

- Light tightness
- Assembly and disassembly cycle endurance
- Thermal and acoustic insulation

TECHNICAL SPECIFICATIONS

Available configurations

Frame colour	Black
Front door	1,80 m width, other optional dimension
Windows on front doors	Yes with crystal + mosquito net + external shutter
Mosquito net on lateral windows	Optional
Polyester inner liner	Optional
Thermal fly	Optional
Partition curtain	Optional
Connection to container or vehicle	Optional
Ceiling net	Yes
Additional sleeves	Optional

Canvas colour	NATO green, sand or white
Lateral door	Optional
Lateral windows	Yes with crystal + external shutter
Ground sheet	Fully welded or velcro
Insulated inner liner	Optional
CBRN liner	Optional
Protective ground sheet	Optional
Blackout capability	Optional
Sleeve	4
Marking / logo	Optional

Flammability of the fabrics	M2	Fabrics repair kit	Yes
Setting-up kit	Yes		

COMPATIBLE EQUIPMENT

Thermal insulation	SPT series	Container and vehicle connection
Compartment and curtain	Internal junction box 230V / 16A	Logo - marking
Rigid flooring	LED lamp	
Hard door	Tent to tent connection	

FIELDS OF USE

Command posts	Field hospital and advanced medical post	Base camp and life support
		CBRN collective protection

PRODUCTION PLANT

I-4S France
47 rue des Églantiers
57660 Grostenquin, France

SALES OFFICE

I-4S
203 rue du Parc
L-3542 Dudelange, Luxembourg

CONTACT

+33 3 72 39 10 00
contact@i-4s.eu
i-4s.eu/en/products/v18-tent/